

15th Water-Rock Interaction International Symposium, WRI-15

North-eastern Morocco: a high geothermal prospect

Antonio Correia^{a,1}, Abdelkrim Rimi^b, Yassine Zarhloule^c, Julio Carneiro^a

^a*Institute of Earth Sciences, University of Evora, R. Romão Ramalho 59, 7000-671 EVORA, Portugal*

^b*Université Mohammed V, Institut Scientifique, Avenue Ibn Battouta, B.P. 703, 10106 Rabat, Morocco*

^c*Laboratory of Hydrogeology-Environment, Faculty of Sciences, Oujda, Morocco*

Abstract

New temperature data obtained in 2007 in a hydrogeological borehole (1100 m deep) near Berkane have revealed an average geothermal gradient of about 126 °C/km at depths greater than 300 m. This result confirms the average geothermal gradient estimated in a mining borehole located about 30 km west of the Berkane borehole, in which water with temperatures as high as 96 °C was reached at a depth of about 700 m. The new geothermal gradient, exceeding by far the ones already determined for this Moroccan area allows thinking about the possibility of programs for using high temperature waters in north-eastern Morocco.

© 2017 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license

(<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the organizing committee of WRI-15

Keywords: Morocco; Geothermal prospect; Heat flow density; Geothermal potential assessment

1. Introduction

In the last decade there has been a renewed interest in the use of geothermal energy for power generation (high enthalpy geothermal resources) and for domestic, industrial and therapeutic uses (low enthalpy geothermal resources). Morocco has followed that same trend and so, since the eighties of the last century, several geothermal campaigns have been organized to collect geothermal data to construct a heat flow density (HFD) map for the territory of the Kingdom of Morocco; the last version of the map can be seen in Fig. 1. From the map it is obvious that the northeast part of Morocco presents the highest heat flow density values for the country. A detailed heat flow density map for that area is shown in Fig. 2 and values higher than 110 mW/m² were obtained there.

With the objective of obtaining geothermal data to infer the geothermal potential of eastern Morocco, an exploratory geothermal survey was conducted in February of 2007 in north-east Morocco, in the region of Oujda.

One borehole in particular (borehole 1624-7 (34.93°N, 2.30°W) in the region of Berkane, see Fig. 2 and Fig. 4)

* Corresponding author. Tel.: +351 266745322; fax: +351 266745394.

E-mail address: correia@uevora.pt

shows a high geothermal gradient and a high geothermal prospect. The well is located 30 km west of Berkane (see Fig. 2).

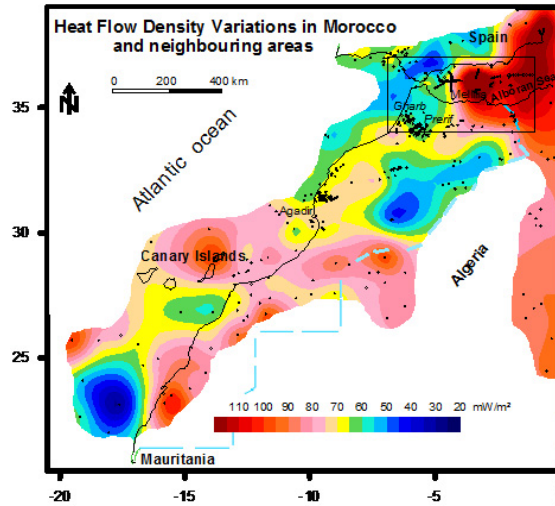


Fig. 1. Heat flow density map for Morocco. The black rectangle represents the study area and the blue dashed line the Moroccan border.

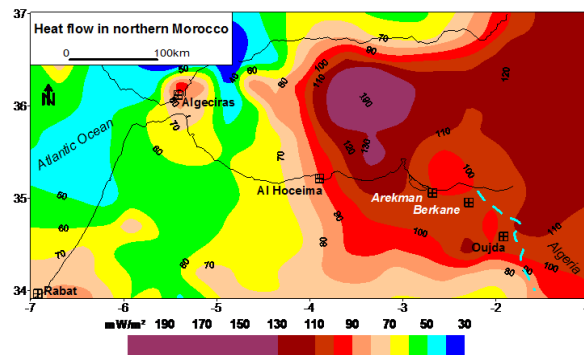


Fig. 2. Detail of the heat flow density map for the northern part of Morocco shown in black rectangle in Fig. 1. Berkane and Kariat Arekman boreholes are also shown. The town of Oujda is located to the east of the Berkane borehole.

Even though it was not considered for geothermal potential calculation of the area, another borehole measured in the late seventies of the last century is also shown in Fig. 3 (Kariat Arekman borehole (35.11N, 2.74W). See Fig. 2 for location). As in the Berkane borehole, the Kariat Arekman borehole shows a very high heat flow density and temperatures as high as 93°C at 650 m depth.

The Berkane borehole is shown in Fig. 4. The calculations presented in this paper are based only in the Berkane borehole because all other boreholes in the area present, on average, the same geothermal characteristics of that borehole.

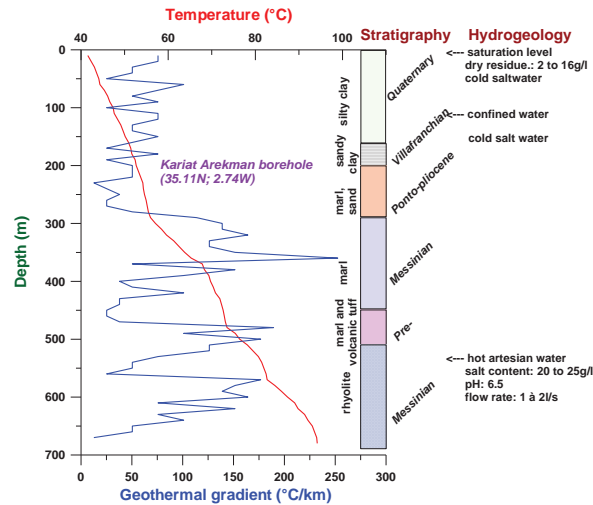


Fig. 3. Kariat Arekman borehole which location is shown in Fig. 2. The temperature log is the red line; the blue line is the geothermal gradient as a function of depth¹.

2. The thermal data

Figure 4 shows the temperature log obtained in borehole 1624-7 in the region of Berkane. The temperature log was obtained with an ANTARES Temperature Datalogger³; the geothermal gradient substantially increases at a depth of 300 m and could, to a certain extent, be explained by a change in lithology. However, the interesting fact is that, instead of decreasing (as it should because dolomites have higher thermal conductivity than clay), the geothermal gradient increases. For the moment there are no thermal conductivity measurements and so no heat flow density estimate can be done; however, there are plans to collect rock samples of the geologic formations crossed by the borehole to estimate the heat flow density for the borehole and for the area where it is located.

3. Results for the Berkane borehole

The change in the geothermal gradient in the Berkane borehole (Fig. 4) is not a result of a thermal conductivity change. A simple calculation shows that the average geothermal gradient above 300 m is about 29 °C/km (0.0293 °C/m) while the geothermal gradient below 300 m is about 127 °C/km (0.1275 °C/m). At a depth of about 470 m the temperature is 50 °C, and assuming that the same formation reaches depths of 700 m (see lithologic log) this means that an estimated temperature of about 78 °C is attained at about 700 m. If a thermal conductivity of 1.5 W/mK is assumed for the clay above 300 m and a thermal conductivity of 4.0 W/mK for the dolomites below 300 the heat flow density along the borehole is not constant and therefore there is geothermal energy trapped for levels below 300 m deep. The estimated heat flow density above 300 m is 43mW/m², and below 300 m is 510 mW/m².

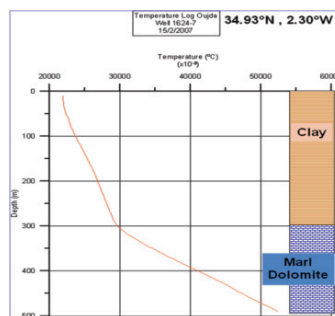


Fig. 4. Berkane borehole shown in Fig. 2. The temperature log is the red line.

If it is further assumed the borehole is representative of the geologic, hydrogeologic, and thermal status for a relatively large area (tens of square km), an estimate of the heat in place (H_0) within the aquifer can be calculated using the following equation²:

$$H_0 = [(1 - \Phi) \cdot \rho_m \cdot C_m + \Phi \cdot \rho_w \cdot C_w] \cdot (T_t - T_0) \cdot A \cdot \Delta z \quad (1)$$

where Φ is the effective porosity, C is the mean specific capacity (J/kgK), ρ is the mean density of the rock column (kg/m^3), T_t is the temperature at the top of the aquifer ($^{\circ}\text{C}$), T_0 the average regional temperature at the surface of the earth ($^{\circ}\text{C}$), A is the area of the aquifer, and Δz is the thickness of the aquifer; the subscripts m and w refer to rock matrix and water, respectively. For the Berkane borehole, if it is assumed that: $\Phi=0.1$, $T_0=20^{\circ}\text{C}$, $T_t=30^{\circ}\text{C}$, $\rho_w=1000 \text{ kg/m}^3$, $\rho_m=2600 \text{ kg/m}^3$, $C_w=4190 \text{ J/kgK}$, $C_m=840 \text{ J/kgK}$, the heat in place per square metre is about $9.5 \times 10^9 \text{ J/m}^2$ ($\sim 9.5 \text{ GJ/m}^2$). It must be said that it was possible to go with the temperature datalogger as deep as 900 m in the borehole; however, we were not expecting that temperatures as high as 50°C would be reached at depths of about 500 m and so the temperature datalogger saturated just above 50°C . The next temperature log must then be obtained with a temperature datalogger that allows to measure temperatures higher than 50°C .

4. Conclusions

1. In the region of Berkane (eastern Morocco) temperatures higher than 50°C were measured in a borehole at depths of about 470 m. 2. The estimated heat in place per square metre is about 9.5 GJ. 3. The geothermal prospect for the Berkane area appears to be high. 4. Other boreholes in the region have to be temperature logged so that the evaluation of the geothermal reserve can be more accurately estimated.

Acknowledgements

This study was performed under the framework of the bilateral Moroccan/Portuguese Project CNRST-GRICES SDT/09.

References

1. Dembele, H., Lopez, N., Sondage de Kariat Arekman (Région de Nador) Etude hydrogéologique et géothermique préliminaire. Unpublished report of Bureau de Recherches et de Participation Minières (BRPM), Morocco, 1977.
2. Muffler, L.J.P., Cataldi, R., Methods for regional assessment of geothermal resources, *Geothermics*, **7**, 53-89, 1978.
3. Pfender, M., Villinger, H., Miniaturized data loggers for deep sea sediment temperature gradient measurements, *Marine Geology*, **186**, 557–570, 2002.